

Law Offices of  
**SCHNECK & SCHNECK**

Thomas Schneck  
David M. Schneck  
Gina McCarthy  
Nissa M. Strottman

P.O. BOX 2-E  
SAN JOSE, CALIFORNIA 95109-0005

Telephone: (408) 297-9733

Facsimile: (408) 297-9748

80 S. Market Street  
Third Floor  
San Jose, California 95113-2303

Email: mail@patentvalley.com

Patents and Trademarks

January 29, 2003

CERTIFIED MAIL

Serge Plotkin  
573 Villa Real  
Palo Alto, CA 94306

RECEIVED

Re: Declaration for U.S. Patent Application  
Serial No. 10/056,178

MAR 13 2003


OFFICE OF PETITIONS

Dear Mr. Plotkin:

We represent Radiant Networks plc which acquired the intellectual property of Caly Networks. You are identified as one of the inventors on a U.S. patent application ("Multi-path Dynamic Routing Algorithm," serial number 10/056,178) filed on January 22, 2002. The three other inventors have signed declarations stating that they are the original inventors of the invention that is the subject matter of this application and also stating their citizenship. Your signature on a similar declaration is also required in order for the patent application to be complete.

We understand that you have been in communication with Adam Flint, one of Radiant's attorneys, and have agreed to review the application and consider signing the declaration. Enclosed, please find a copy of the application and the declaration as well as an assignment of the invention to Radiant. After reviewing the application, please sign the declaration and assignment, and return them to us. We would appreciate receiving your reply by February 15, 2003. If you have any questions, please feel free to contact us.

Sincerely,

  
Nissa M. Strottman

NS:mpg

Encl: Copy of application  
Declaration  
Assignment

cc: Adam Flint w/o encl.

**EXHIBIT D**

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)  
Approved for use through 9/30/00. OMB 0651-0032  
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

<b>DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)</b>  <input type="checkbox"/> Declaration Submitted with Initial Filing    OR <input checked="" type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)	<b>Attorney Docket Number</b>	CALY-012
	<b>First Named Inventor</b>	Patrick A. Worfolk
	<b>COMPLETE IF KNOWN</b>	
	<b>Application Number</b>	10 / 056,178
	<b>Filing Date</b>	January 22, 2002
	<b>Group Art Unit</b>	2662
<b>Examiner Name</b>		

**As a below named inventor, I hereby declare that:**

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**MULTI-PATH DYNAMIC ROUTING ALGORITHM**

the specification of which (Title of the Invention)

☐ is attached hereto  
OR  
☒ was filed on (MM/DD/YYYY) **01/22/2002** as United States Application Number or PCT International Application Number **10/056,178** and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)

☐ Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

## DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (If applicable)
09/589,631	06/07/2000	

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☒ Customer Number

003897

Place Customer Number Bar Code Label here

☒ Registered practitioner(s) name/registration number listed below

Name	Registration Number	Name	Registration Number
Thomas Schneck	24,518	David M. Schneck	43,094
Mark Protsik	31,788	Nissa Strottman	52,257
Gina McCarthy	42,986	Kwan Chan	P-52,714

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☒ Customer Number 003897 OR ☒ Correspondence address below

Name	Schneck & Schneck				
Address					
Address	P.O. Box 2-E				
City	San Jose	State	CA	ZIP	95109-0005
Country	U.S.A.	Telephone	408/297-9733	Fax	408/297-9748

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))		Family Name or Surname	
Patrick A.		Worfolk	
Inventor's Signature			Date
Residence: City	Campbell	State	CA
		Country	U.S.A.
Post Office Address	1526 Redding Park Lane		
Post Office Address			
City	Campb ll	State	CA
		ZIP	95008
		Country	U.S.A.

☒ Additional inventors are being named on the 1 supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

Please type a plus sign (+) inside this box → ☐

PTO/SB/02A (3-97)  
Approved for use through 9/30/98. OMB 0651-0032  
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

<b>DECLARATION</b>	<b>ADDITIONAL INVENTOR(S)</b> <b>Supplemental Sheet</b> Page <u>1</u> of <u>1</u>
--------------------	---

<b>Name of Additional Joint Inventor, if any:</b>				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
Serge				Plotkin			
Inventor's Signature						Date	
Residence: City	Palo Alto	State	CA	Country	U.S.A.	Citizenship	U.S.A.
Post Office Address 573 Villa Real							
Post Office Address							
City	Palo Alto	State	CA	ZIP	94306	Country	U.S.A.
<b>Name of Additional Joint Inventor, if any:</b>				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
Shmuel				Ravid-Rabinovitz			
Inventor's Signature						Date	
Residence: City	Jerusalem	State		Country	Israel	Citizenship	Israel
Post Office Address 36 Harav Berlin Street							
Post Office Address							
City	Jerusalem	State		ZIP	92506	Country	Israel
<b>Name of Additional Joint Inventor, if any:</b>				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
Itai				Aaronson			
Inventor's Signature						Date	
Residence: City	Belmont	State	CA	Country	U.S.A.	Citizenship	U.S.A.
Post Office Address 1210 Bellevue Avenue, Apt. 204							
Post Office Address							
City	Belmont	State	CA	ZIP	94010	Country	U.S.A.

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

## A S S I G N M E N T

WHEREAS, the undersigned, SERGE PLOTKIN, having an address of 573 Villa Real, Palo Alto, County of Santa Clara, State of California 94306 (hereinafter termed Assignor) has invented certain new and useful improvements in an invention entitled: MULTI-PATH DYNAMIC ROUTING ALGORITHM; filed January 22, 2002 and assigned Serial No. 10/056,178;

WHEREAS, RADIANT NETWORKS PLC, an English company, having an address of The Mansion, Chesterford Park, Little Chesterford, Essex, CB10 1XL, United Kingdom (hereinafter termed Assignee) is desirous of acquiring the entire right, title and interest in and to said application and said invention and improvements thereon, and in and to Letters Patent thereon when granted in the United States and foreign countries;

NOW, THEREFORE, in consideration of the sum of One Dollar (\$1.00) and for other good and valuable consideration received by said Assignor from said Assignee, the receipt and sufficiency of which in full are hereby acknowledged by said Assignor:

1. Said Assignor does hereby sell, assign, transfer and convey unto said Assignee, the entire right, title and interest in and to said application and said invention and in and to any and all improvements on said invention heretofore or hereafter made or acquired by said Assignor; and in and to any and all Letters Patent on said invention and/or said improvements that may be granted in the United States or any foreign country, including each and every Letters Patent granted on any application which is a division,

continuation, substitution, renewal, or continuation-in-part of any of said application specifically identified herein, and in and to each and every reissue or extension of said Letters Patent.

2. Said Assignor hereby covenants and agrees to cooperate with said Assignee whereby said Assignee may enjoy to the fullest extent the right, title and interest herein conveyed. Such cooperation shall include (a) prompt execution of all papers (prepared at the expense of Assignee) which are deemed necessary or desirable by Assignee to perfect in it the right, title and interest herein conveyed; (b) prompt execution of all petitions, oaths, specifications or other papers (prepared at the expense of Assignee) which are deemed necessary or desirable by Assignee for prosecuting said application, for filing and prosecuting divisional, continuation, substitution, renewal, continuation-in-part, or additional applications in the United States and/or foreign countries covering said invention and/or said improvements, for filing and prosecuting applications for reissuance of Letters Patent included herein, or for interference proceedings involving said invention and/or said improvements; (c) prompt assistance and cooperation in the prosecution of interference proceedings involving said invention and/or said improvements and in the adjudication of said Letters Patent, particularly by the disclosure of facts and the production of evidence relating to said invention and/or said improvements, provided the expenses which may be incurred by said Assignor in lending such assistance and cooperation shall be paid by the Assignee.

3. The terms, covenants and conditions of this Assignment shall inure to the benefit of said Assignee, its successors, assigns and/or other legal representatives, and

shall be binding upon said Assignor, his heirs, legal representatives and assigns.

4. Said Assignor hereby warrants and represents that he has not entered into any assignment, contract or understanding in conflict therewith.

IN WITNESS WHEREOF, this said Assignor has executed and delivered this instrument on the date shown below.

Date: \_\_\_\_\_  
SERGE PLOTKIN

County of Santa Clara    )  
                                  )   s.s.  
State of California        )

On \_\_\_\_\_, 2003 before me \_\_\_\_\_,  
personally appeared SERGE PLOTKIN, personally known to me (or  
proved to me on the basis of satisfactory evidence) to be the  
person whose name is subscribed to the within instrument and  
acknowledged to me that he executed the same in his authorized  
capacity, and that by his signature on the instrument the  
person, or the entity upon behalf of which the person acted,  
executed the instrument.

WITNESS my hand and official seal.

Signature \_\_\_\_\_ (Seal)



## Description

### MULTI-PATH DYNAMIC ROUTING ALGORITHM

#### 5 CROSS-REFERENCE TO RELATED APPLICATION

This application is a continuation-in-part of prior application Ser. No. 09/589,631, filed June 7, 2000, now abandoned.

#### 10 TECHNICAL FIELD

The invention relates to a method for improving routing in data networks. In particular, the invention discloses a method for routing data in shared media networks based upon dynamic, algorithmic path metric  
15 evaluation.

#### BACKGROUND ART

Metrics are numbers associated with a telecommunications network that allow comparison of  
20 various paths connecting the same pair of source-destination routers. In U.S. Pat. No. 4,905,233 to Cain et al., there is a disclosed use of path metrics for establishing a transmission route between a source node and a destination node in a multinode communications  
25 network. The method involves monitoring transmission characteristics of each of the transmission paths among the respective nodes of the network so as to derive a plurality of path metrics representative of the ability of the respective transmission paths of the network to  
30 transmit communication signals. Then, feasible transmission routes to be used for the transmission of communication signals from the source node to the destination node are selected as those routes which extend from the source node to the destination node and  
35 each of which is comprised of one or more transmission

paths among the nodes of the network and the sum of path metrics of transmission paths from neighboring nodes to the destination node is less than the path metric of a transmission path the end nodes of which corresponds to the source and destination nodes. Communication signals are then transmitted from the source node to the destination node over the selected feasible transmission routes.

For a different example, consider Fig. 1 where path comprises a set of links 130 connecting a pair of source-destination routers 120. A designer selects the metrics so that traffic load takes the most efficient path defined by the minimum path metric. Routers 120 can actually evaluate the metric of the entire path connecting a pair of source-destination routers 120. Routing algorithms can compute a metric as a value that applies to an end-to-end path. With this use, metrics allow comparisons of the paths to the same destination router 120. Another use of metrics is to determine the cost associated with outgoing links 130 from a router 120. In many routing algorithms, the end-to-end metric (path metric) is the sum of link metrics.

Prior art routing protocols use different methods of computing the metric. Some, like Routing Information Protocol (RIP), count the hops (number of routers 120 on the path) between the pair of source-destination routers 120. Others have no standard way of computing a metric, making its computation a local choice. Factors used in computing metrics include the following: 1. link bandwidth; 2. link delay; 3. administrative preference, such as monetary cost; 4. link error rate; 5. link utilization. Not all these factors are useful in real networks. In particular, improper use of link utilization in link metrics may create path oscillation. For instance, suppose there is traffic load

on Path 1 (not shown) to a destination. Then, Path 2 (not shown) is created and also has connectivity to the same destination. Assume that both Paths 1 and 2 have equal bandwidth. Path 2 becomes more attractive than the more heavily loaded Path 1. Traffic load then migrates to Path 2, making Path 1 less loaded and now more attractive than more heavily loaded Path 2. This leads to the best path choice alternating between Path 1 and Path 2.

Metrics are generally comparable only within the same dynamic routing protocol. RIP uses hop count, whereas IGPR (Interior Gateway Routing Protocol) and EIGPR (Enhanced IGPR) use the same complex formula that, in practice, generally is bandwidth based. OSPF (Open Shortest Path First) use an arbitrary interface cost that, in practice, like IGPR and EIGPR, is bandwidth based.

Consider now the prior art network of Fig. 2, each node 210 in network 200 can communicate with only one of its neighboring nodes 210 at any one time. For instance, assuming Node 4 has a bandwidth of 100Mbps, the sum of the communication rates (in Mbps) at which Node 4 communicates with its neighboring Nodes 1, 2, 5, and 6 must be 100 Mbps or less. This means that a traffic load from Node 1 to Node 5 via Node 4 affects the bandwidth left for another traffic load from Node 2 to Node 6 via Node 4, and vice versa. Specifically, if Node 4 uses 40 Mbps of its bandwidth to receive packets from Node 2 and another 40 Mbps of its bandwidth to forward the packets to Node 6, it has only 20 Mbps of bandwidth left to handle traffic load from Node 1 to Node 5. It may use 10 Mbps of the remaining bandwidth of 20 Mbps to receive packets from Node 1 and uses the last 10 Mbps of its available bandwidth to forward the packets to Node 5.

For network 200, typical metric assignments of the prior art would have disadvantages. First, a hop count metric does not reflect the merit of the path. For example, assuming Node 4 uses 40 Mbps of its bandwidth of 100 Mbps for receiving packets from Node 2 and uses 40 Mbps for forwarding the packets to Node 6, if Node 1 wants to send a flow at 40 Mbps to Node 5, relying on hop count metrics, it will split the load 50-50 between the two paths via Node 3 and Node 4, assuming load balancing is applicable here. This means that Node 4 uses its last 20 Mbps of bandwidth for receiving packets from Node 1. With input rate at 60 Mbps (40 Mbps from Node 2 and 20 Mbps from Node 1) and output rate at only 40 Mbps (to Node 6), Node 4 has to use a buffer to store packets for later forwarding to Node 5. Soon, the queue in this buffer will overflow and Node 4 has to drop packets. This is called node congestion. Therefore, hop count metrics do not reflect the need for Node 1 to divert its traffic load to Node 3.

Secondly, metric assignments based on link bandwidth also have disadvantages if applied to network 200. Assuming that link 1-4 (connecting Node 1 and Node 4) and link 4-5 (connecting Node 4 and Node 5) have very high bandwidth, and therefore, have low metrics, it follows that the path from Node 1 to Node 5 via Node 4 will be preferred. However, in network 200 of the present invention, Node 4 is the limiting factor, not links 1-4 and 4-5. Typical metrics for links 1-4 and 4-5 will not change and hence path metric for the path including these two links will also not change even when Node 4 runs out of bandwidth handling traffic load from Node 2 to Node 6 via Node 4. As a result, if Node 1 wants to send a flow at 40 Mbps to Node 5, the path via Node 4 is an attractive one, while the path is in fact congested at Node 4.

In patent application S.N. 09/187,665, filed November 5, 1998, incorporated by reference, corresponding to published PCT application WO 00/25485, published May 4, 2000, owned by the assignee of the present invention a wireless mesh network is described with reference to Fig. 3, similar to Fig. 1, having fully mutually interconnected, line-of-sight nodes 12-19. All nodes need not be interconnected, so long as a node has line of sight communication with at least one neighbor, with the neighbor being in line of sight communication with the rest of the network on the same basis. Communication between nodes is by packets using a protocol whose basic features are described in patent application S.N. 09/328,105, filed June 8, 1999, incorporated by reference herein and owned by the assignee of the present invention. In the protocol described therein, time is broken up into frames of known length. In each frame, every node has scheduled slots with which to exchange control information with each of its neighbor nodes, the slots forming a control channel. Any time a node is not participating in a control channel transmission or reception, it is free to schedule the transmission or reception of data packets. As part of the control channel, requests are made to transmit bits. As part of the request, information about unscheduled periods, i.e. available time or gaps, in the requesting node's data channel is transmitted. The node receiving the requests to transmit (RTS) grants or denies transmissions. Part of the grant includes a schedule, selected from the requester's schedule, for when to transmit the data.

The media access control layer (MAC layer) is the interface between the link layer that generates and consumes the payload data units (PDUs) and the physical layer that is responsible for the actual transmission.

The general principle of the MAC protocol is that each pair of neighbors must communicate control information on a regular basis in order to schedule data transmissions. Thus, there is the concept of a frame. During every  
5 frame, a node communicates with each of its neighbors making requests to send (RTS) and making grants of clear to send (CTS). The time spent transmitting and receiving this control information is called the control channel. Data transmissions are interwoven throughout the frame,  
10 avoiding the control channel. The performance of the MAC scheduling depends on the following factors: (1) the length of the frame, (2) the percent of the frame taken up by the control channel, (3) the efficiency of scheduling data around the control channel, (4) the  
15 efficiency of scheduling data transmissions between neighboring nodes. What is needed is a path metric system which takes advantage of fully scheduled transmissions to and from neighboring nodes.

An object of the present invention is to  
20 provide a new metric system to better guide the selection of the paths between any pair of source-destination routers given the availability of fully scheduled transmission to and from neighboring nodes.

## 25 DISCLOSURE OF THE INVENTION

The present invention achieves the stated object by using a new algorithm for computing a path metric. The status of a path is represented by a path metric which is computed by summing the node metrics of  
30 the intermediate nodes on the path based upon future scheduled traffic from and to neighboring nodes. Factors used in computing node metrics include the following: 1. future traffic load from neighboring nodes to the node; and 2. future traffic load from the node to the  
35 neighboring nodes. Future traffic load information is

communicated between neighbors. The algorithm of the present invention relies upon future scheduled transmitting times from and to other nodes, with schedules that are continuously updated. Communicating nodes reach an agreement on future times available for the exchange of data, allowing instantaneous calculation of node metrics which are summed for alternative paths to determine path selection. Upon calculation of node metrics, path metrics are computed and then traffic is routed considering the metrics in managing the present and future traffic queue to and from each node. This is unlike the prior art where most present or past traffic data is considered, with future data not being the principal factor in path metric calculation. In the present invention node metrics are completely forward looking.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a plan of a typical communications network of the prior art.

Fig. 2 illustrates hubs and routers in the network of Fig. 1.

Fig. 3 is a diagram of a fully connected mesh topology network of the prior art.

Fig. 4 is a signal session diagram between two nodes showing a data communications protocol employed between neighbors in the network of Fig. 3.

Fig. 5 is a state machine diagram for logic of the control channel illustrated in Fig. 4.

Figs. 6A and 6B are signal transmission diagrams between two neighboring nodes showing the relation of a plurality of gaps of the kind illustrated in Fig. 4, existing between two nodes.

Fig. 7 is a graph of mean delay time versus gaps using the state machine of Fig. 5.

Fig. 8 is a flow diagram of a node metric computation in accordance with the present invention.

Fig. 9 is a flow diagram of a path metric computation in accordance with the present invention.

5            Fig. 10 is a flow diagram of a route traffic allocation in accordance with the present invention using the path metrics of Fig. 9.

#### BEST MODE FOR CARRYING OUT THE INVENTION

10            The following description of a network environment in which the algorithm of the present invention may be employed is taken from U.S. patent application S.N. 09/589,631, filed June 7, 2000, owned by the assignee of the present invention. Other networks  
15            are possible, so long as the node metrics are based upon future incoming and outgoing traffic. With reference to Fig. 3, a wireless mesh topology network 11 of the prior art is shown having mutually interconnected nodes. In the present invention, all nodes need not be  
20            interconnected, so long as a node has line of sight communication with at least one neighbor, with the neighbor being in line of sight communication with the rest of the network on the same basis. Communication between nodes is by packets using a known protocol. The  
25            basic features of the protocol are as follows.

#### Sample Protocol

Time is broken up into frames of known length. In each frame, every node has scheduled slots with which  
30            to exchange control information with each of its neighbors, thereby defining a control channel. Any time a node is not participating in a control channel transmission or reception, it is free to schedule the transmission or reception of data packets. As part of  
35            the control channel, requests are made to transmit bits.



As part of the request, information about unscheduled periods, i.e. available time or gaps, in the requesting node's data channel is transmitted. The node receiving the requests to transmit (RTS) grants or denies transmissions. Part of the grant includes a schedule, selected from the requestor's schedule, for when to transmit the data. Note that the schedule contains schedule information for data exchange to and from neighboring nodes.

10           The general principle of the communications protocol herein is that each pair of neighbors must communicate control information on a regular basis in order to schedule bidirectional data transmissions. Thus, we have the concept of a frame. During every  
15   frame, a node communicates with each of its neighbors making requests to send (RTS) and making grants of clear to send (CTS). The time spent transmitting and receiving this control information is called the control channel. Data transmissions are interwoven throughout the frame,  
20   avoiding the control channel. The performance of the media access control ("MAC") scheduling depends on the following factors: (1) the length of the frame, (2) the percent of the frame taken up by the control channel, (3) the efficiency of scheduling data around the control  
25   channel, (4) the efficiency of scheduling data transmissions between neighboring nodes.

          Within each frame, each node must communicate with each of its neighbors. The basic idea is that a request for transmission is made, accompanied with some  
30   information about when a transmission can be made. The potential receiver must then grant all or part or none of the request. With each neighbor, the basic communications that need to occur are:

          An RTS message to the neighbor with information  
35   about free time in the node's schedule.

A CTS message from the neighbor granting transmission at some mutually agreeable time.

An RTS message from the neighbor with information about the neighbor's unscheduled time.

5           An CTS message to the neighbor granting transmission at some mutually agreeable time. The above exchange is called a session and is shown in Fig. 4.

10           With reference to Fig. 4, the length of the session is indicated by the arrow, L, and is the same for both nodes A and B, indicated by horizontal lines, but it is offset by the propagation delay, indicated by the diagonal arrows D, E. and F. The A node, which is seen to transmit the first RTS to the B node, indicated by the D arrow, is the initiator and carries the schedule of the A node for time available for data. This is followed by  
15           a CTS transmission from the B node to the A node with an agreed time. The B node then transmits to the A node an RTS transmission with a schedule of available time for data. Arrow F indicates an acknowledgment by the A node  
20           with an agreed time for the transmission of requested data.

#### Gaps Amidst the Control Channel Data for Data Payload

25           In Fig. 5, the basic state machine for the control channel logic is seen to have two loops 23 and 25 about idle state 27. From an idle state, it will be seen that the A node transmits an RTS message to the B node, indicated by wait state 22 where the RTS schedule is read for acknowledgment with an agree transmission time sent  
30           by node B with a CTS message to node A. A transmission is then scheduled by node A as indicated by state 24. Node B also lists available unscheduled gaps with a request to node A, indicated by state 26 wherein node A starts a scheduling algorithm, develops a schedule,  
35           indicated by state 28 and transmits a CTS message to node

B. This sequence is carried out among all neighbors. The length of the session between node A and node B is the sum of the following:

- 5     1. The propagation delay of the RTS message from the initiator A node to the recipient neighbor B node.
2. The transmission delay for the entire RTS packet to arrive.
3. The processing time it takes the neighbor to schedule  
10    the RTS.
4. The propagation delay of the CTS message from the neighbor B node back to the initiator A node.
5. The transmission delay for the entire CTS message to arrive.
- 15    6. The transmission delay for the entire RTS message to arrive.
7. The processing time it takes the initiator to schedule the neighbor B node's RTS.
8. The transmission delay of transmitting the entire CTS  
20    packet. Assuming that the RTS and CTS messages have the same length, the length of the session is: 4 control packet (message) lengths + 2 propagation delays + 2 processing times. Every node must have at least one session with each of its neighbors every frame and none  
25    of the sessions can be overlapping. The sessions occur on a fixed schedule. This schedule is determined for the entire network by a global scheduling algorithm. It is important to establish a "from neighbor" and a "to neighbor" schedule component for each node. In this  
30    algorithm, the following assumptions are made: the topology of the network is known. The propagation delays between neighbors are known. The control packet transmission delays are known. The processing time is constant. A schedule for the sessions of each node in  
35    the network is computed and distributed to each node.

When the topology of the node changes, for example due to admission or departure of nodes, a new session schedule will need to be computed, propagated to all nodes in the mesh, and implemented at a specified future time.

5           Every node knows, in addition to its own control channel schedule, its neighbor's control channel schedule. This is true for all neighbors for which there is line of sight communication. It may also know the control channel schedule for other base stations where  
10 there can be no communication, but these control channel microslots may be disregarded. During a data transmission to a neighbor, the node must break transmissions in order to maintain its own control channel transmissions and receptions. Similarly, it must  
15 break transmission to allow its neighbor to maintain its control channels. The broadcasting node must take into account propagation delays when pausing for a neighbor's control channel. The small time slots used for the control channel are called microslots. It is not  
20 required that a node's and its neighbor's RTS and CTS exchanges be back to back, however this is an efficient way to schedule the control channel.

          In Fig. 6A, the horizontal lines A and B indicate two neighbor nodes in a mesh topology network.  
25 With reference to Fig. 6A, the control channels or microslots for a node are shown. The timing of the channels is known and broadcast to other nodes. When transmitting to node B, and A node is particularly interested in the microslots of the B node, shown below  
30 the microslots of the A node, but on the same time schedule. The downwardly descending arrow, G, indicates the propagation lag of the node B receiver compared to the node A transmitter on RTS. Similarly, the ascending arrow, H, indicates the propagation lag of the node A  
35 receiver compared to the node B transmitter on RTS.

In Fig. 6B, the microslots of node B have been mapped to node A, taking into account propagation delay, since node A must know the microslot schedule of the neighboring node. The dark rectangles on the A node line are the B node control channels. Note that gaps exist between the combined microslots in the A node line. These gaps are available for use by the data channel for transmission from A to B.

Now consider protocols for making a request to send, RTS, to a neighbor. Each node has an opportunity to make an RTS call to a specific neighbor once per frame. The first step is to determine how many bits are queued to be sent to this neighbor that have not yet been scheduled. The full number of bits are requested.

Optionally, the request may be limited to a smaller number of bits. A node tracks the times which it has already scheduled to receive or send data. Between these times, there are gaps, and there is an end of schedule time. The node knows the earliest possible time it will receive a CTS from a neighbor. It then selects the first 3 gaps after this time and also the end of schedule time to package into the RTS. The start and stop time of the gaps relative to CTS is what is packaged into the RTS. More or fewer gaps could optionally be selected. Other criteria could be used for selecting gaps to broadcast.

When an RTS signal is received (for more than 0 bits), then it is the receiving node's responsibility to make the schedule. The first step is to determine the intersection of the gaps and end of schedule information from the requesting node and gaps in the schedule of the receiving node. The first 3 gaps are kept and the rest discarded. As much of the transmission as possible is scheduled in these gaps, starting with the first gap. If there is extra room, then the last gap(s) are either shortened or discarded. If the gaps are not long enough,

the remaining bits are scheduled at the end of the schedule. This results in a scheduled transmission in at most 4 segments (each segment will be woven around the control channel, possible resulting in further segmentation). Note that the number of bits that can be transmitted in a gap depends on the control channel schedules of the two nodes. The gaps must be identified in the RTS and CTS fields. In the packet format table below, the bits identified as gaps are for address or location information of gaps outside of the control channel where data is to be found within the same frame.

#### Control Channel Packet Format Example

	RTS message (in a packet)	bits
15	Requested number of bits, in 512 bit increments (0-1024*512, or 0-3.9 msec at 128 Mbps)	10
	Gap 1: [start, stop] offset from end of CTS arrival (0.-4.096 msec, with 1/8 microsec granularity)	30
	Gap 2: [start, stop] offset from end of CTS arrival	30
20	Gap 3: [start, stop] offset from end of the CTS arrival	30
	End of Schedule	15
	TOTAL	115

The RTS and CTS packets can be sent even when zero bits are requested or scheduled. This allows for modem synchronization and regular monitoring of neighboring node status.

#### Schedule Determination

	CTS message (in a packet)	bits
30	Gap 1: [start, stop] offset from end of CTS arrival (0.-4.096 msec, with 1/8 microsec granularity)	30
	Gap 2: [start, stop] offset from end of CTS arrival	30
	Gap 3: [start, stop] offset from end of the CTS arrival	30
	Gap 4: [start, stop] offset from end of CTS arrival	30
35	TOTAL	115

The control channel is scheduled so that each node has at least one session per frame with each of its neighbors and is participating in at most one session at any instance in time. Multiple sessions per frame may be  
5 used where it is necessary to identify a large number of gaps. The length of the frame determines the minimum frequency at which a node has the opportunity to request and grant transmissions. Thus, frame length impacts the responsiveness of the network and the delays in the  
10 network. Shorter frames result in quicker response and shorter delay, but at the cost of decreased data bandwidth. Scheduling in an optimally short frame is in general a complex problem. However, an optimal schedule for control channels is in general not required, nor is  
15 it necessarily desirable. A simple algorithm that performs scheduling is as follows:

1. List all sessions that need to be scheduled.
2. Select a session and schedule it as early as possible  
20 (either node may be the originator).
3. Repeat step 2 until all sessions are scheduled. The suitability of such a schedule will depend on the network and its desired performance. Shorter schedules can be produced through modifications to the above algorithm or  
25 through a variety of alternative algorithms.

#### Example of Gap Usage With Determined Schedule

Simulations of the following network have been performed: 8 node mesh, as shown in Fig. 3, fully  
30 connected nodes randomly placed in a circle with a diameter of 3km, using a 128 Mbps bandwidth, with all packets having 1024 bits at full traffic load. Each node generates 64\*1024 packets/second and each packet's destination is randomly uniformly selected from a node's  
35 neighbors with 1 microsecond long microslots and with 10

microseconds of scheduled processing time and a frame length of 378 microseconds (control channel is 7.4%). The minimum transmit time is 1 microsecond in which 4 gaps plus end of schedule are passed in the RTS; five  
5 gaps are returned in the CTS. This simulation assumes arbitrary accuracy on gap boundaries and with no limit on how far ahead the gaps are. Also, queue lengths are not limited.

Fig. 7 shows the effect of changing the number  
10 of gaps identified in an RTS signal compared with the delay as a function of information passed in the RTS signal at 70%load. By employing at least 3 gaps in the RTS, the mean delay is minimized. There is minimal gain in increasing the number of gaps, although this may be  
15 done for redundancy or other reasons. There is always one more gap provided in the CTS signal than in the RTS signal.

#### Node and Path Metrics of the Present Invention

20 In accordance with the present invention the node metrics are computed with an algorithm employing scheduled traffic to and from neighboring nodes in a totally predictive manner. This is in contradistinction to the prior art which employed present or past traffic  
25 date for metric calculation, with perhaps some predictive considerations. The knowledge of available gaps contained in a schedule at each node enables totally predictive metrics to be computed. After node metrics are established, path metrics are determined. After  
30 determining path metrics, traffic loads are allocated.

Before describing the predictive algorithm of the present invention, consider the following example of how a path metric is established and used and how bandwidth is allocated.



Returning to Fig. 2, the metric of the path from Node 1 to Node 5 via Node 4 will be computed by summing the node metrics of all intermediate nodes. Here, Node 4 is the only intermediate node of the path, therefore, its metric is also the path metric of the path. Other methods of combining the node metrics of the intermediate nodes along the path may be used to compute the path metric.

10    Bandwidth Allocation

          The node bandwidth of node 210 is the maximum processing rate of the node 210 in network 200. Because a node 210 can communicate with only one other node 210 at any one time, the bandwidth of the node 210 is shared among its links. Assuming that Node 4 has a bandwidth of 100 Mbps, this bandwidth can be shared among its four links to Nodes 1, 2, 5, and 6. In other words, the sum of traffic rates on the four links of Node 4 must be 100 Mbps or less. In general, let  $R(i,j)$  denote the traffic rate on link  $i-j$ , then  $R(4,1) + R(4,2) + R(4,5) + R(4,6) \leq 100$  Mbps, where the symbol  $\leq$  denotes less than or equal. Similarly, for Node 3,  $R(3,1) + R(3,5) \leq 100$  Mbps, assuming the maximum bandwidth of Node 3 is 100 Mbps.  $R(i,j)$  represents the sum of traffic rates in two directions on the  $i-j$  link: from Node  $i$  to Node  $j$  and from Node  $j$  to Node  $i$ .

          Traffic load on the four links of Node 4 can be input traffic load if the packets are coming to Node 4, or output traffic load if the packets are coming out of Node 4. If input traffic rates exceed output traffic rates, some input packets must be queued in buffer of Node 4. The length of this queue is a component in the computation of Node 4's metric. If output traffic rates

exceed input traffic rates, some packets previously stored in the queue are now forwarded to the predetermined destination.

5     Node Metric Components

           The node metric of a node in accordance to the present invention has the following components: a from-neighbor component and a to-neighbor component. The from-neighbor component of the metric of the node  
10   reflects the bandwidth of the node needed to handle the data transfer demand from the node's neighboring nodes. If the node's neighbors have big queues of packets to be sent to the node and these neighbors have available bandwidths to send these packets to the node, then the  
15   node will have to use much of its bandwidth to receive these packets from the neighbors. In other words, if the queues in the neighbors for packets to be sent to the node grow longer and these neighbors have a lot of available bandwidths to send these packets to the node,  
20   the node metric of the node should be increased to show that the node will be busier handling the growing data transfer demand from the node's neighboring nodes.

           The to-neighbor component of the metric of the node enabled by the scheduling process described above,  
25   reflects the bandwidth of the node needed to handle the data transfer demand from the node to its neighbors. If the node has large queues of packets to be sent to its neighbors, then the node will have to use much of its bandwidth to send these packets to the neighbors. In  
30   other words, if the queues in the node for packets to be sent to the neighbors grow longer, the node metric of the node should be increased to show that the node will be busier handling the growing data transfer demand from the node to the neighbors.

Future traffic load on a link of a node is represented by the number of packets to be sent either from the node to the neighbor at the other end of the link (the "to neighbor" component) or from the neighbor to the node (the "from neighbor" component). These packets may be in queue in the node waiting for the neighbor to receive them. These packets may also be in queues in the neighbors waiting for the node to receive them. With reference to Fig. 2, assuming Node 4 is using its entire capacity and then Node 1 has packets to be sent to Node 4, Node 1 has to put these packets in its queue to be sent to Node 4 later when Node 4 has some available bandwidth. The from-neighbor component and the metric of Node 4 should be increased to reflect the effect that some of Node 4's bandwidth will have to be used in the future to empty the queue in Node 1 (i.e., to receive the packets from the queue in Node 1). An exception applies if Node 1 is also busy and will not be able to send the packets from its queue to Node 4 even if Node 4 has available bandwidth to receive them. In this case, the metric of Node 4 should not be increased because the packets in the queue will not be a burden for Node 4 as long as Node 1 has no bandwidth available to send them to Node 4. In other words, either the length of the queue in Node 1 or the bandwidth available for Node 1 to empty the queue is the limiting factor contributing to the metric of Node 4. When one is the limiting factor, it should be in the formula for calculating the node's metric, and the other non-limiting factor should not. However, simulations show that the non-limiting factor should also be present, to a lesser extent, in the formula for calculating the metric of the node. A formula for calculating node metrics is discussed later.

On a periodic basis, say every microsecond, the node metrics are updated (recomputed). The node metric components may be added together to yield the metric for the node or they may be multiplied by a coefficient before adding together, depending on the designer's desired characteristics for the network.

Node metrics have the essential property that if the traffic load on some path increases the node's load, the node's metric will increase. A node can have a high metric that contributes to a path metric of a path even if there is no traffic load on any link of the path. The measure of congestion at each node (node metric), described below, needs to be propagated back towards the source. This is easily done through special routing packets that are sent periodically or through piggybacking the information on other control or data packets.

#### Node Metric Algorithm

The following illustrates the computation of the node metrics using the present invention. Node  $n$  computes its own node metric  $M_n$ , as shown in Fig. 8, using the formula:

$$M_n = \sum_{i \in N} A_n(i) + \sum_{i \in N} B_n(i), \quad (1)$$

where

$N$  is the set of all neighbors of Node  $n$ ,

$$A_n(i) = Q_i(n) \quad \text{if } Q_i(n) < BWA_i(n), \quad (2a) \text{ or}$$

$$(1-\alpha) * Q_i(n) + \alpha * [\beta * Q_i(n) + (1-\beta) * BWA_i(n)],$$

otherwise, (2b)

where

$$\alpha = BWG_n(i) / BWA_i(n),$$

$$\beta = BWA_i(n) / BW_i,$$

$$B_n(i) = Q_n(i) \quad \text{if } Q_n(i) < BWA_n(i), \quad (3a) \text{ or}$$

$$(1-\lambda) * BWG_i(n) + \lambda * [\theta * BWG_i(n) + (1-\theta) * Q_n(i)],$$

otherwise, (3b)

5

where

$$\lambda = BWG_i(n) / BWA_n(i)$$

$$\theta = BWA_n(i) / BW_n,$$

10 where

$Q_i(n)$  is the queue length at Node i for packets to be sent to Node n.

$Q_n(i)$  is the queue length at Node n for packets to be sent to Node i.

15  $BWA_i(n)$  is the bandwidth available at Node i for sending packets to Node n over a defined period of time.  $BWA_i(n)$  represents the numbers of bits that can be transferred from Node i to Node n over a defined period of time. Node i informs Node n about  $BWA_i(n)$ .

20  $BWA_n(i)$  is the bandwidth available at Node n for sending packets to Node i over a defined period of time.  $BWA_n(i)$  represents the numbers of bits that can be transferred from Node n to Node i over a defined period of time. Node n informs Node i about  $BWA_n(i)$ .

25  $BWG_i(n)$  is the bandwidth granted by Node i for receiving packets from Node n over a defined period of time. Node i informs Node n about  $BWG_i(n)$  after Node n informs Node i about  $BWA_n(i)$ .

30  $BWG_n(i)$  is the bandwidth granted by Node n for receiving packets from Node i over a defined period of time. Node n informs Node i about  $BWG_n(i)$  after Node i informs Node n about  $BWA_i(n)$ .

$BW_n$  is the maximum bandwidth of Node n, i.e., the capacity of Node n.

$BW_i$  is the maximum bandwidth of Node  $i$ , i.e., the capacity of Node  $i$ .

$\sum_{i \in N} A_n(i)$ , on the left side of Fig. 8, is the from-neighbor component of the node metric of Node  $n$ .

5  $A_n(i)$  reflects the future traffic load on link  $i-n$ , from Node  $i$  to Node  $n$ , that Node  $n$  will have to use some or all of its available bandwidth to handle.  $A_n(i)$  may depend on at least two variables:  $Q_i(n)$  and  $BWA_i(n)$ . If  $Q_i(n)$  is short, i.e., the queue length at Node  $i$  for  
10 packets to be sent to Node  $n$  is short, or in other words, there are not many packets to be sent to Node  $n$ , Node  $n$ 's metric should be low reflecting this good news for any path passing Node  $n$ . If  $BWA_i(n)$  is small, i.e., the bandwidth available at Node  $i$  for sending to Node  $n$  is  
15 small, Node  $i$  can send only a small number of packets to Node  $n$ , Node  $n$ 's metric should be low to reflect this good news for any path passing Node  $n$ . Either one of these two terms will be a limiting factor. For example, if Node  $i$  is free and, therefore, has much available  
20 bandwidth to send packets to Node  $n$ , but there are few packets queued in Node  $i$  to be sent to Node  $n$ , i.e.,  $Q_i(n)$  is small, then  $Q_i(n)$  is the limiting factor and should alone represent  $A_n(i)$ . In formula (2a) above, this situation corresponds to the condition  $Q_i(n) < BWA_i(n)$ ,  
25 therefore,  $A_n(i) = Q_i(n)$ . Here,  $Q_i(n)$  alone represents  $A_n(i)$ . Conversely, assuming there are a lot of packets queued in Node  $i$  to be sent to Node  $n$ , i.e.,  $Q_i(n)$  is large, and Node  $i$  has little bandwidth available to send these packets in its queue to Node  $n$ , i.e.,  $BWA_i(n)$  is  
30 small, then  $BWA_i(n)$  is the limiting factor and should alone represent  $A_n(i)$ . That is  $A_n(i) = BWA_i(n)$  if  $Q_i(n) > BWA_i(n)$ . However, simulations have shown that formula (2b) works better. Formula (2b) interpolates between  $Q_i(n)$  and  $BWA_i(n)$ . With the assumption above and with  
35 formula (2b),  $A_n(i) = BWA_i(n)$ . This is expected.

Specifically, with the assumption above,  $BWG_n(i) = BWA_i(n)$ , because Node n can easily match/grant the small  $BWA_i(n)$ , therefore,  $\alpha = 1$ . In addition,  $\beta = 0$  because  $BWA_i(n)$  is small. Therefore, formula (2b) is reduced to  
 5  $A_n(i) = BWA_i(n)$ , which is expected for the condition  $Q_n(i) > BWA_i(n)$ . In the analysis above,  $\alpha$  is near 1 and  $\beta$  is near zero, but to simplify the analysis,  $\alpha$  and  $\beta$  takes the values of 1 and 0, respectively.

$\sum_{i \in N} B_n(i)$ , on the right side of Fig. 8, is the  
 10 to-neighbor component of the node metric of Node n.  $B_n(i)$  reflects the future traffic load on link n-i, from Node n to Node i, that Node n will have to use some or all of its available bandwidth to handle.  $B_n(i)$  may depend on at least two variables:  $Q_n(i)$  and  $BWA_n(i)$ . Assuming  $Q_n(i)$  is  
 15 short, i.e., the queue length at Node n for packets to be sent to Node i is short, or in other words, there are not many packets to be sent to Node i, Node n's metric should be low reflecting this good news for any path passing Node n. Assuming further that Node n is free and,  
 20 therefore, has much available bandwidth to send packets to Node i, but there are few packets queued in Node n to be sent to Node i, i.e.,  $Q_n(i)$  is small, then  $Q_n(i)$  is the limiting factor and should alone represent  $B_n(i)$ . In formula (3a) above, this situation corresponds to the  
 25 condition  $Q_n(i) < BWA_n(i)$ , therefore,  $B_n(i) = Q_n(i)$ . Here,  $Q_n(i)$  alone represents  $B_n(i)$ . Conversely, assuming there are a lot of packets queued in Node n to be sent to Node i, i.e.,  $Q_n(i)$  is large, and Node n has little bandwidth available to send these packets in its queue to  
 30 Node i, i.e.,  $BWA_n(i)$  is small, then  $BWA_n(i)$  is the limiting factor and should alone represent  $B_n(i)$ . That is  $B_n(i) = BWA_n(i)$  if  $Q_n(i) > BWA_n(i)$ . However, the fact that  $BWA_n(i)$  is small also indicates that Node n is nearly congested, therefore, formula (3b) with interpolation  
 35 between  $Q_n(i)$  and  $BWA_n(i)$  better measures the congestion

at Node n in relation to the future traffic load from Node n to Node i. Simulations have shown to that effect.

The node metric  $M_n$  of Node n can be rewritten as:

5 
$$M_n = \sum_{i \in N} [A_n(i) + B_n(i)],$$

where  $A_n(i) + B_n(i)$  is the metric contribution corresponding to the node pair n-i including Node n and Node i. After computing all metric contributions, Node n  
10 combines them to yield its metric. In the formula above, combines means adds together.

#### Path Metric Determination

With reference to Fig. 9, the congestion of a  
15 route represented by the route's path metric is determined by summing the measure of congestion of all the intermediate nodes (node metrics) excluding the source and destination nodes. The congestion of a route (path) can also be determined by weighted sum method, sum  
20 of exponential method, maximum method, or their combination. The weighted sum method means each of the node metrics of the nodes on the path excluding the source and destination nodes is multiplied by a coefficient before adding together. Sum of exponential  
25 method means each of the node metrics of the nodes on the path excluding the source and destination nodes is raised to some exponential before adding together. Maximum method means the highest node metric among the node metrics of the nodes on the path excluding the source and  
30 destination nodes is used as the path metric.

#### Traffic Allocation

After the path metrics of all available paths from the source node to the destination node are  
35 availabl to the source node, the source node can



allocate its traffic load to the destination node in the following ways, as shown in Fig. 10.

1. Always use the path having lowest path metric.

5           2. Use all available paths with the amount of traffic load on each path being inversely proportional to the path metric.

          3. Use only the best N paths, where N can be fixed or variable. The allocation of traffic load  
10 between these paths can be equal or dependent on the path metrics of these paths.

          4. Allocate traffic load equally among the available paths and then shift the load from the most congested paths to the least congested paths. The shift  
15 amount may be a fixed amount (in percentage) or dependent on the differences in congestion.

          For example, considering Fig. 2 and Figs. 8-10, assume that each node 210 of network 200 has a maximum bandwidth (capacity) of 120 Mbps. Node 2 generates data  
20 to Node 6 via Node 4 at a rate of 54 Mbps, as the result, Node 4 uses 54 Mbps of its 120 Mbps bandwidth for receiving packets from Node 2, and another 54 Mbps for forwarding these packets to Node 6. As a result, Node 4 has only 12 Mbps of its bandwidth left ( $120 - 2 \times 54$ ).

25 Now, assuming that, Node 1 starts sending data to Node 5 at a rate of 54 Mbps. There are two available paths for this traffic load. The first path goes through Node 3, and the second path goes through Node 4 (assuming further that no looping is allowed). Initially, the load from  
30 Node 1 is to be split 50-50 between the two paths, e.g., the first packet is to be sent to Node 3, the second packet to Node 4, the third packet to Node 3, and so on. This is equivalent to 27 Mbps from Node 1 to Node 4. In other words, Node 1 informs Node 4 about Node 1's  
35 bandwidth available of 27 Mbps. But, Node 4 has only 12

Mbps left to receive this. As a result, Node 4 uses all of its remaining 12 Mbps for receiving packets from Node 1. In other words, Node 4 grants only 12 Mbps for receiving packets from Node 1. Node 4 informs Node 1

5 about the grant and transfer from Node 1 to Node 4 at 12 Mbps starts. As a result, some of the packets from Node 1 intended for Node 4 must be put in a queue in Node 1. There are several events leading to the further increase of Node 4's node metric  $M_4$ . First, the length  $Q_1(4)$  of

10 the queue in Node 1 that holds packets to be sent to Node 4 increases. According to formula (2a),  $A_4(1)$ ,  $\sum_{i \in N} A_4(i)$ , and  $M_4$  increase. Second, the length  $Q_4(5)$  of the queue in Node 4 that holds packets to be sent to Node 5 increases because Node 4 has no bandwidth left for forwarding

15 packets from Node 1 to Node 5. Formula (3b) applies here because  $Q_4(5) > BWA_4(5)$ , where  $BWA_4(5) = 0$ . As a result,  $B_4(5) = Q_4(5)$ , with  $\lambda = BWG_5(4)/BWA_4(5) = 1$ , and  $\theta = BWA_4(5)/BW_4 = 0$ . Therefore, when  $Q_4(5)$  increases,  $B_4(5)$ ,  $\sum_{i \in N} B_4(i)$ , and  $M_4$  increase. All of these events

20 contribute to increase the metric  $M_4$  of Node 4 when the metric of Node 4 is updated every micro second. Node 1 promptly realizing the low path metric for the first path and a very high path metric for the second path shifts most of its load to the first path. The increase rate of

25 the metric  $M_4$  of Node 4 gets smaller and smaller when traffic rate from Node 1 to Node 4 decreases from 12 Mbps down to 6 Mbps. At this time, Node 4 uses 6 Mbps for forwarding packets from Node 1 to Node 5, the queue in Node 4 for packets from Node 1 to be sent to Node 5 stops

30 growing. However, Node 1 continues to shift load from the second path to the first path. At some point in time, the queue in Node 1 for packets from Node 1 to be sent to Node 4 stops growing and begins shrinking. At steady state, Node 1 sends 89% (48.1 Mbps) through the

first path and 11% (5.9 Mbps) through the second path. This results in a total of 119.9 Mbps (54 + 54 + 5.9 + 5.9) which is within the capacity of Node 4.

5       The node metric system of the present invention does not rely on any particular kind of scheduling or bandwidth allocation, so long as from neighbor and to neighbor components are used. The scheduling algorithm used with the node metric system of the present invention does not have to be capable of dynamic allocation of  
10   bandwidth, but is particularly adapted to packet communication. The node metric system of the present invention can be used for networks whose communications are in Time Division Multiple Access (TDMA) mode, Frequency Division Multiple Access (FDMA) mode, or Code  
15   Division Multiple Access (CDMA) mode. It should be noted that the physical layer is inconsequential so that the present invention could be used on cable, radio, satellite, fiber or a combination of these.

      The node metric system of the present  
20   invention, when examining the merit of a path (path metric), takes into account future scheduled traffic loads on other paths that share the same node(s) with the path under examination. Therefore, the node metric system of the present invention has an advantage over  
25   prior art link metric systems, especially for wireless mesh topology networks of the type described.

## Claims

1. A method of routing traffic from a source node to a destination node in a mesh topology network connected to a plurality of hosts, said network having a plurality of nodes that are routers, including source node and destination node and a plurality of links connecting said nodes, the method comprising the steps of:

    computing a node metric for each node of said plurality of nodes, said node metric reflecting the congestion level of said node by accounting for future scheduled traffic from-neighboring nodes and to-neighboring nodes;

    determining a path metric for each path of a plurality of paths from source node to destination node; and

    allocating the load from source node to destination node to said plurality of paths according to the path metric of each path of said plurality of paths.

2. The method of claim 1 wherein said computing a node metric for each node comprising the steps of:

    calculating a from-neighbor component of said node metric, said from-neighbor component reflecting the future traffic load from a plurality of neighbors of said node to said node;

    calculating a to-neighbor component of said node metric, said to-neighbor component reflecting the future traffic load from said node to said plurality of neighbors; and

    combining said from-neighbor component with said to-neighbor component to yield said node metric.

3. The method of claim 2 wherein said calculating a from-neighbor component of said node metric comprises the steps of:

determining a first future traffic load for each link of a first plurality of links of said node; and  
combining the first future traffic load of said first plurality of links of said node to yield said from-neighbor component of said node metric.

4. The method of claim 3 wherein said determining a first future traffic load for each link of a first plurality of links of said node comprises the steps of:

determining the length of a first queue in a first neighbor at the other end of said link, said first queue storing the packets to be sent to said node;

determining the available bandwidth of said first neighbor for sending data to said node; and

analyzing said length of said first queue and said available bandwidth of said first neighbor to yield said first future traffic load for said link.

5. The method of claim 4 wherein said analyzing also takes into account a bandwidth granted by said node to said first neighbor.

6. The method of claim 4 wherein said analyzing comprises using an interpolation method.

7. The method of claim 3 wherein said calculating a to-neighbor component of said node metric comprises the steps of:

determining a second future traffic load for each link of a second plurality of links of said node; and

combining the second future traffic load of said second plurality of links of said node to yield said to-neighbor component of said node metric.

8. The method of claim 2 wherein said calculating a to-neighbor component of said node metric comprises the steps of:

determining a second future traffic load for each link of a second plurality of links of said node; and

combining the second future traffic load of said second plurality of links of said node to yield said to-neighbor component of said node metric.

9. The method of claim 8 wherein said determining a second future traffic load for each link of a second plurality of links of said node comprises the steps of:

determining the length of a second queue in said node, said second queue storing the packets to be sent to a second neighbor being at the other end of said link;

determining the available bandwidth of said node for sending data to said second neighbor; and

analyzing the length of said second queue and said available bandwidth of said node to yield said second future traffic load for said link.

10. The method of claim 9 wherein said analyzing also takes into account a bandwidth granted by said node to said second neighbor.

11. The method of claim 9 wherein said analyzing comprises using an interpolation method.

12. A method of routing traffic load from a source node to a destination node in a mesh topology network connected to a plurality of hosts, said network having a plurality of nodes that are routers, including source node and destination node and a plurality of links connecting said nodes, the method comprising the steps of:

computing a node metric for each node of said plurality of nodes by calculating a metric contribution for each link of a first plurality of links of said node, accounting for future scheduled traffic to and from the node in each link, and combining said metric contributions of said first plurality of links to yield said node metric;

determining a path metric for each path of a plurality of paths from source node to destination node; and

allocating the load from source node to destination node to said plurality of paths according to the path metric of each path of said plurality of paths.

13. The method of claim 12 wherein said calculating a metric contribution for each link comprises the steps of:

determining a first future traffic load for said link from a neighbor being at the other end of said link to said node;

determining a second future traffic load for said link from said node to said neighbor; and

combining said first future traffic load and said second future traffic load to yield said metric contribution for said link.

14. The method of claim 13 wherein said determining a first future traffic load comprises the steps of:

determining the length of a first queue in said neighbor, said first queue storing the packets to be sent to said node;

determining the available bandwidth of said neighbor for sending data to said node; and

analyzing said length of said first queue and said available bandwidth of said neighbor to yield said first future traffic load for said link.

15. The method of claim 14 wherein said analyzing also takes into account a bandwidth granted by said node to said neighbor.

16. The method of claim 14 wherein said analyzing comprises using an interpolation method.



17. The method of claim 14 wherein said determining said second future traffic load comprises the steps of:

determining the length of a second queue in said node, said second queue storing the packets to be sent to a said neighbor;

determining the available bandwidth of said node for sending data to said neighbor; and

analyzing the length of said second queue and said available bandwidth of said node to yield said second future traffic load for said link.

18. The method of claim 13 wherein said determining said second future traffic load comprises the steps of:

determining the length of a second queue in said node, said second queue storing the packets to be sent to a said neighbor;

determining the available bandwidth of said node for sending data to said neighbor; and


analyzing the length of said second queue and said available bandwidth of said node to yield said second future traffic load for said link.

19. The method of claim 18 wherein said analyzing also takes into account a bandwidth granted by said neighbor to said node.


20. The method of claim 18 wherein said analyzing comprises using an interpolation method.

## Abstract of the Disclosure


Disclosed is a routing algorithm that uses a new concept of node metric system for optimizing the throughput of a network, in particular, a shared medium network. The measure of congestion of a path in the network is represented by a path metric which is computed by summing the node metrics of the intermediate nodes on the path. Factors used in computing node metrics include the following: 1. future traffic load from neighboring nodes to the node; and 2. future traffic load from the node to the neighboring nodes.

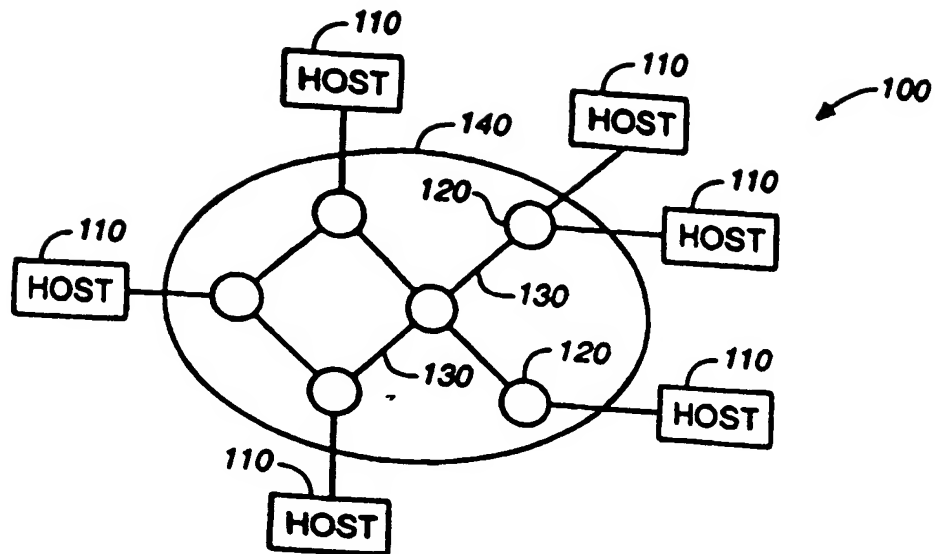


*Fig. 1*  
(Prior Art)

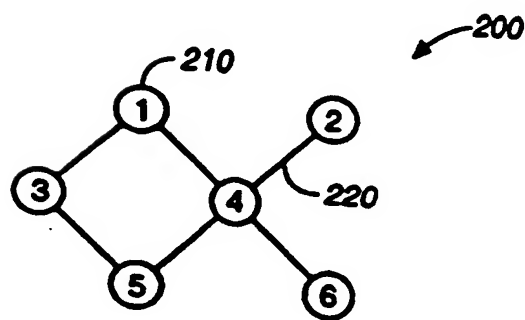

*Fig. 2*  
(Prior Art)

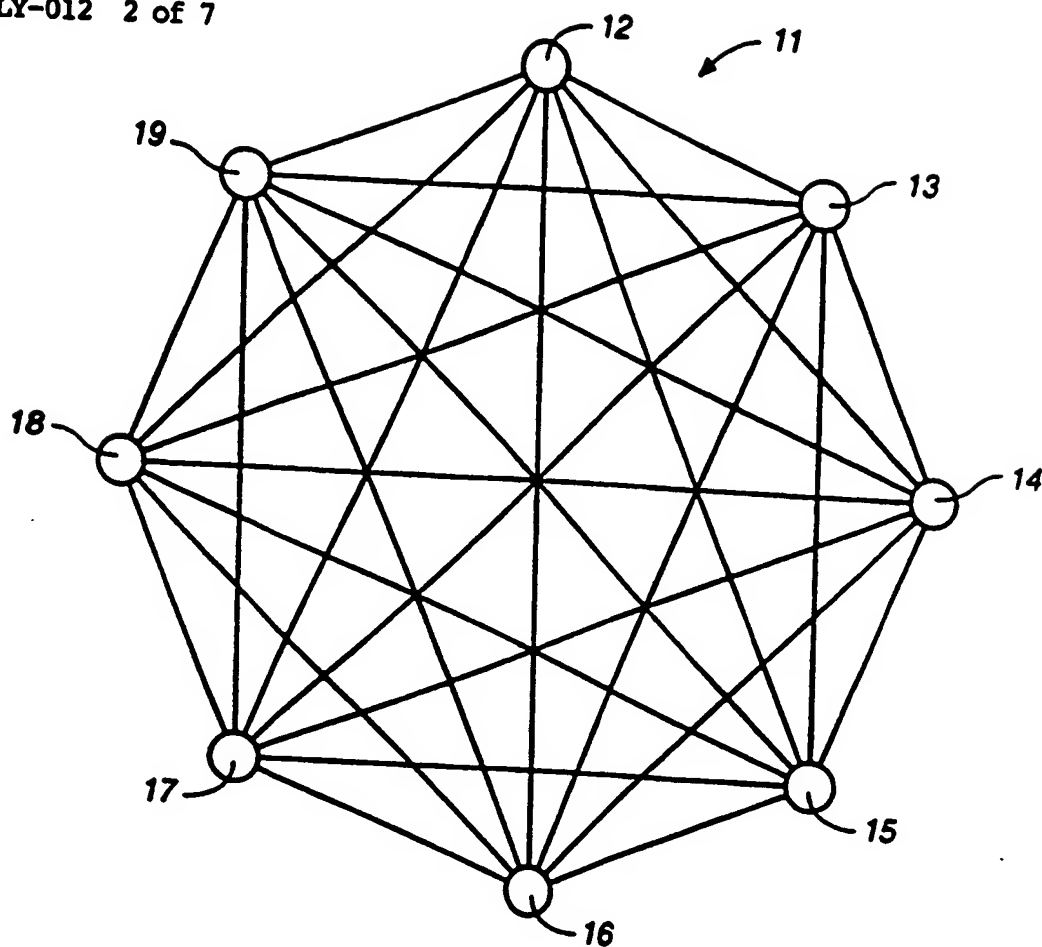

*Fig. 3*  
(Prior Art)

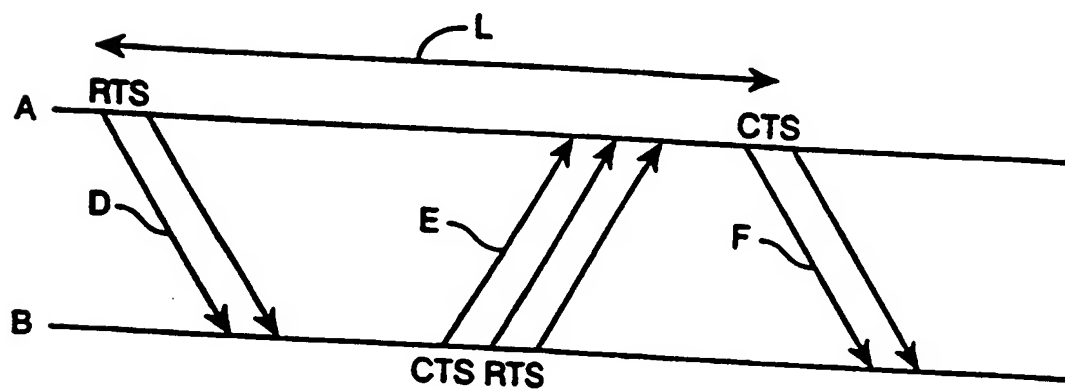

*Fig. 4*  
(Prior Art)



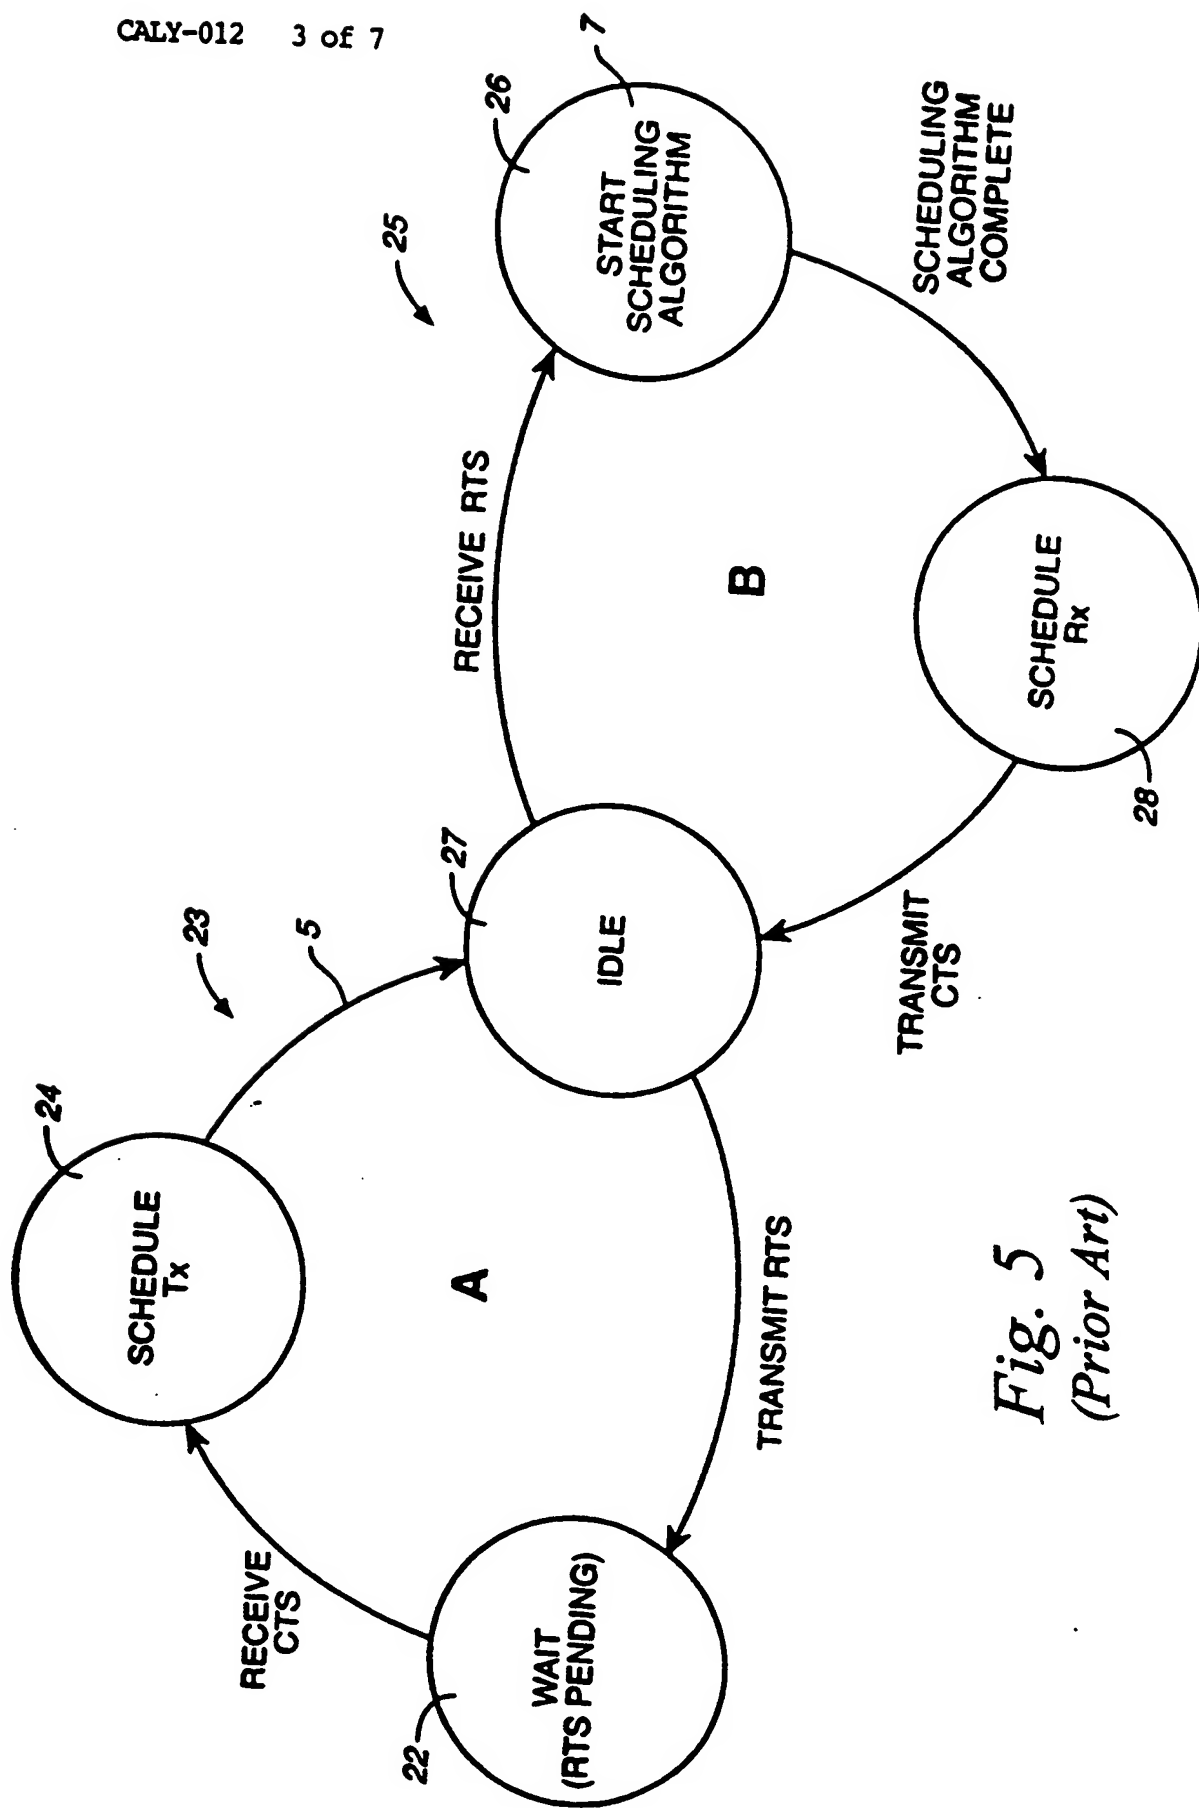



Fig. 5  
(Prior Art)

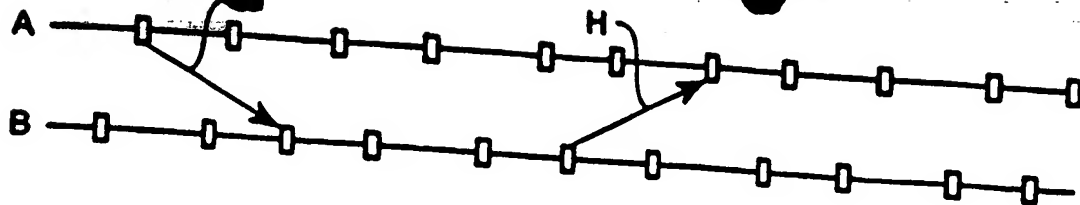

*Fig. 6A*  
(Prior Art)

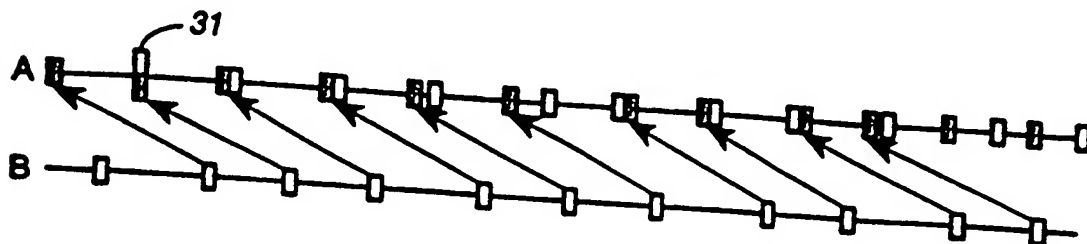

*Fig. 6B*  
(Prior Art)

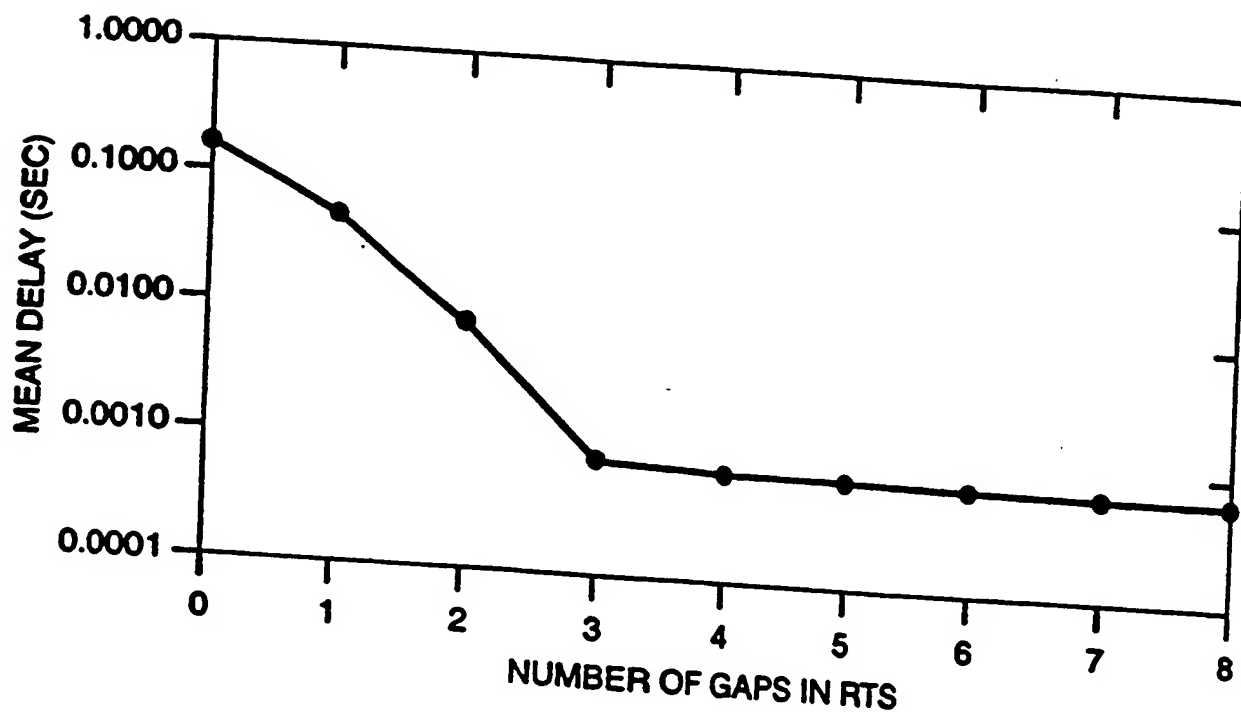

*Fig. 7*  
(Prior Art)


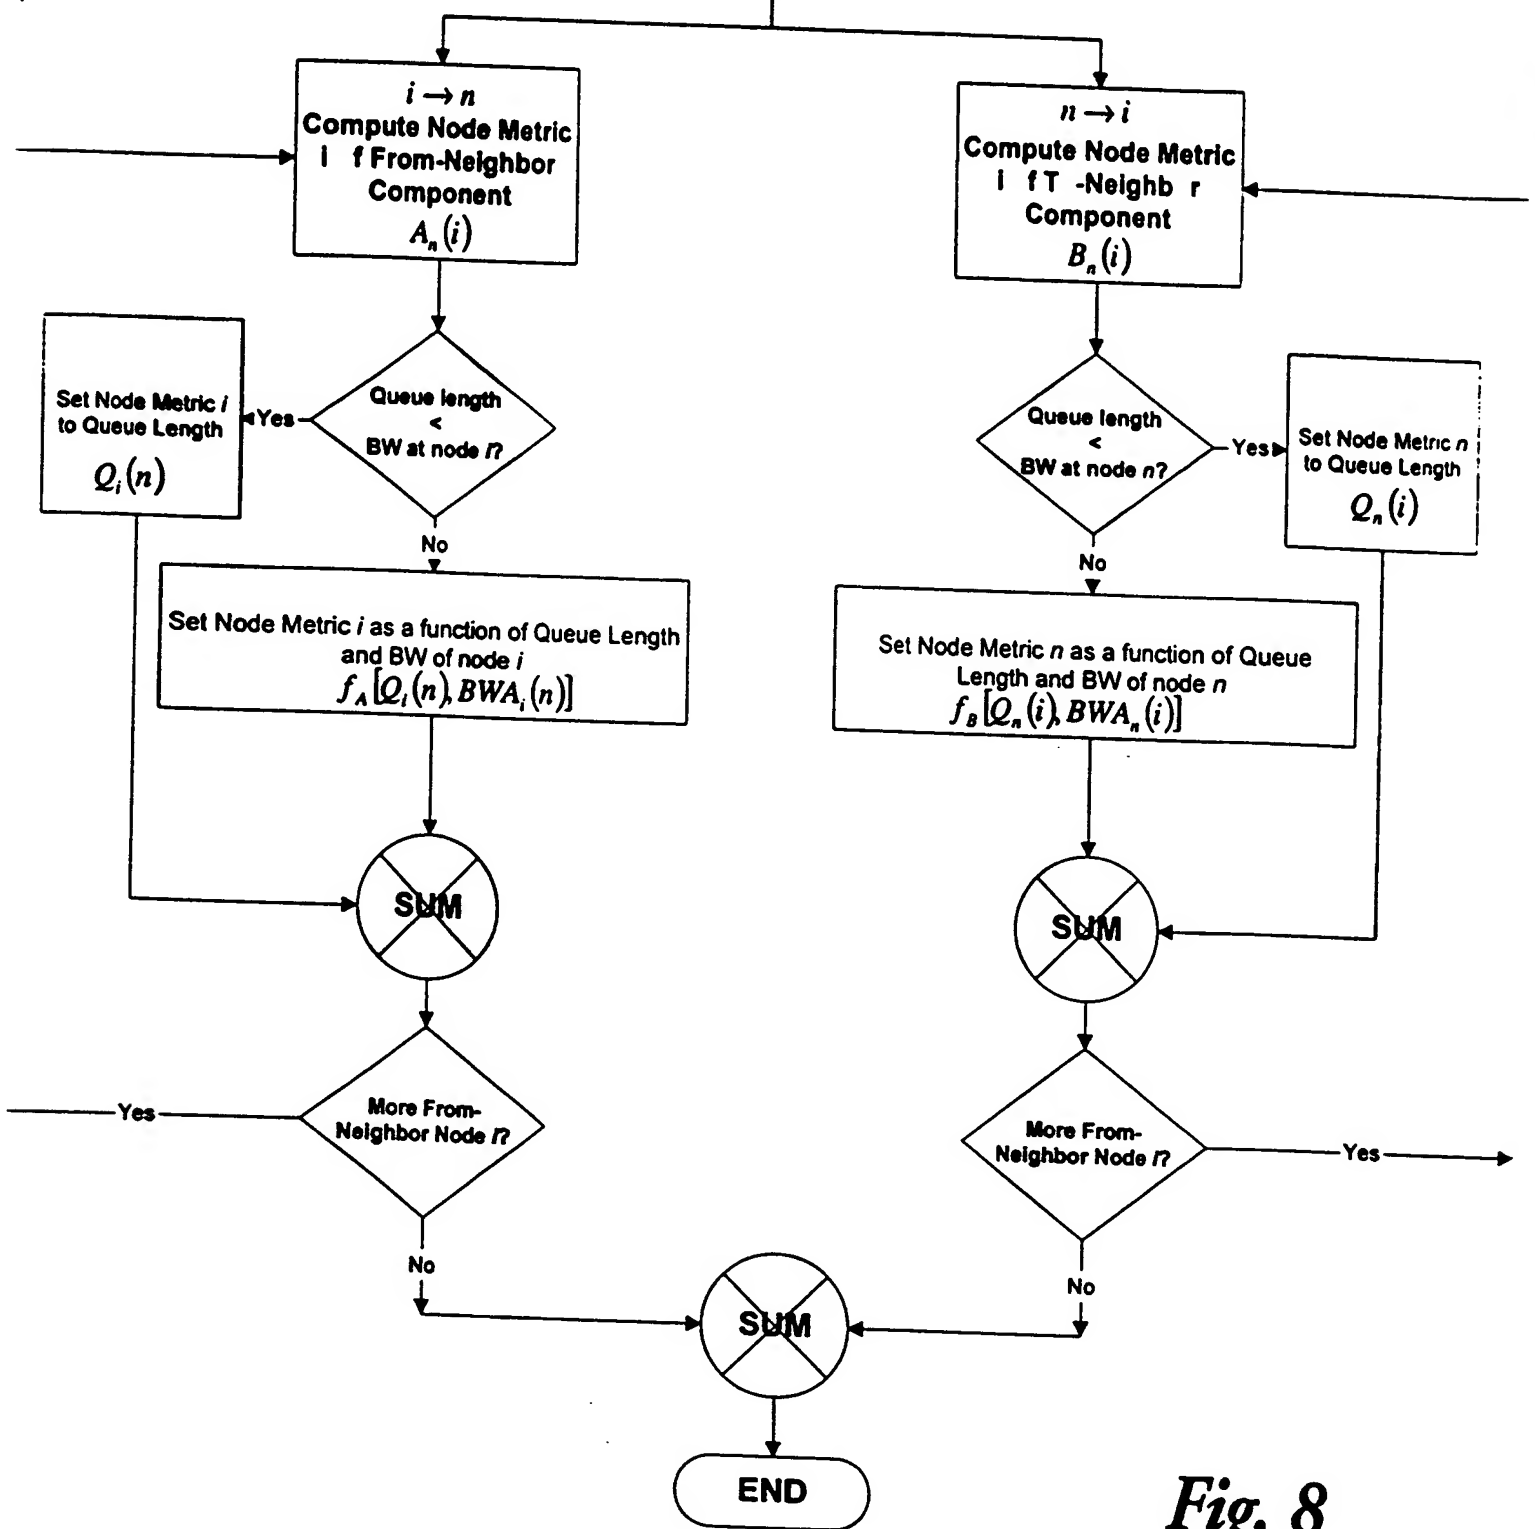


Fig. 8


$$f_A[Q_i(n), BWA_i(n)] = (1 - \alpha) \cdot Q_i(n) + \alpha \cdot [\beta \cdot Q_i(n) + (1 - \beta) \cdot BWA_i(n)]$$

$$f_B[Q_n(i), BWG_n(i)] = (1 - \lambda) \cdot Q_n(i) + \lambda \cdot [\theta \cdot BWG_n(i) + (1 - \theta) \cdot Q_n(i)]$$

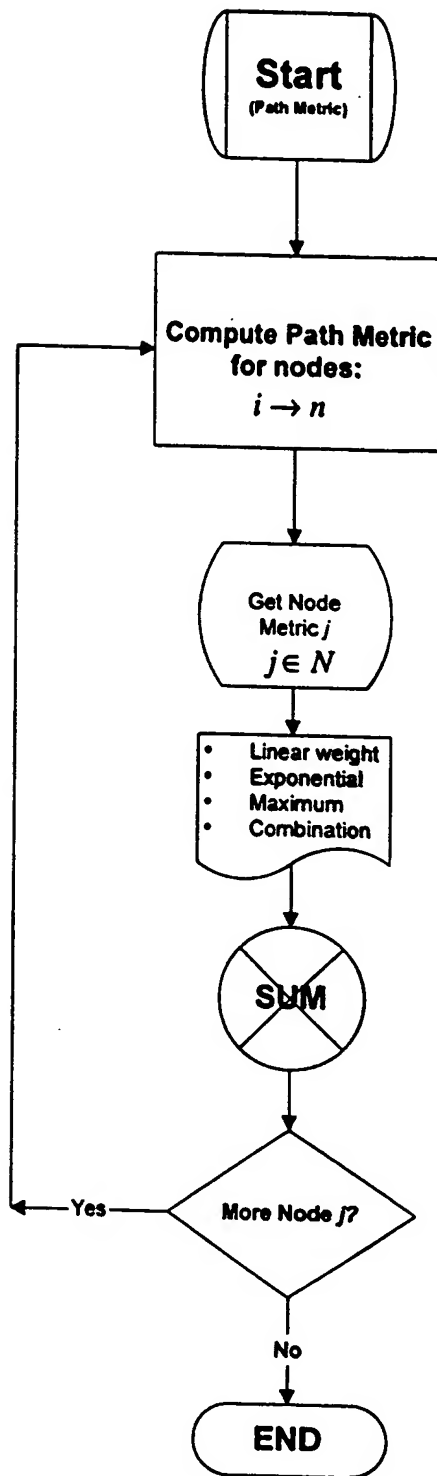

*Fig. 9*



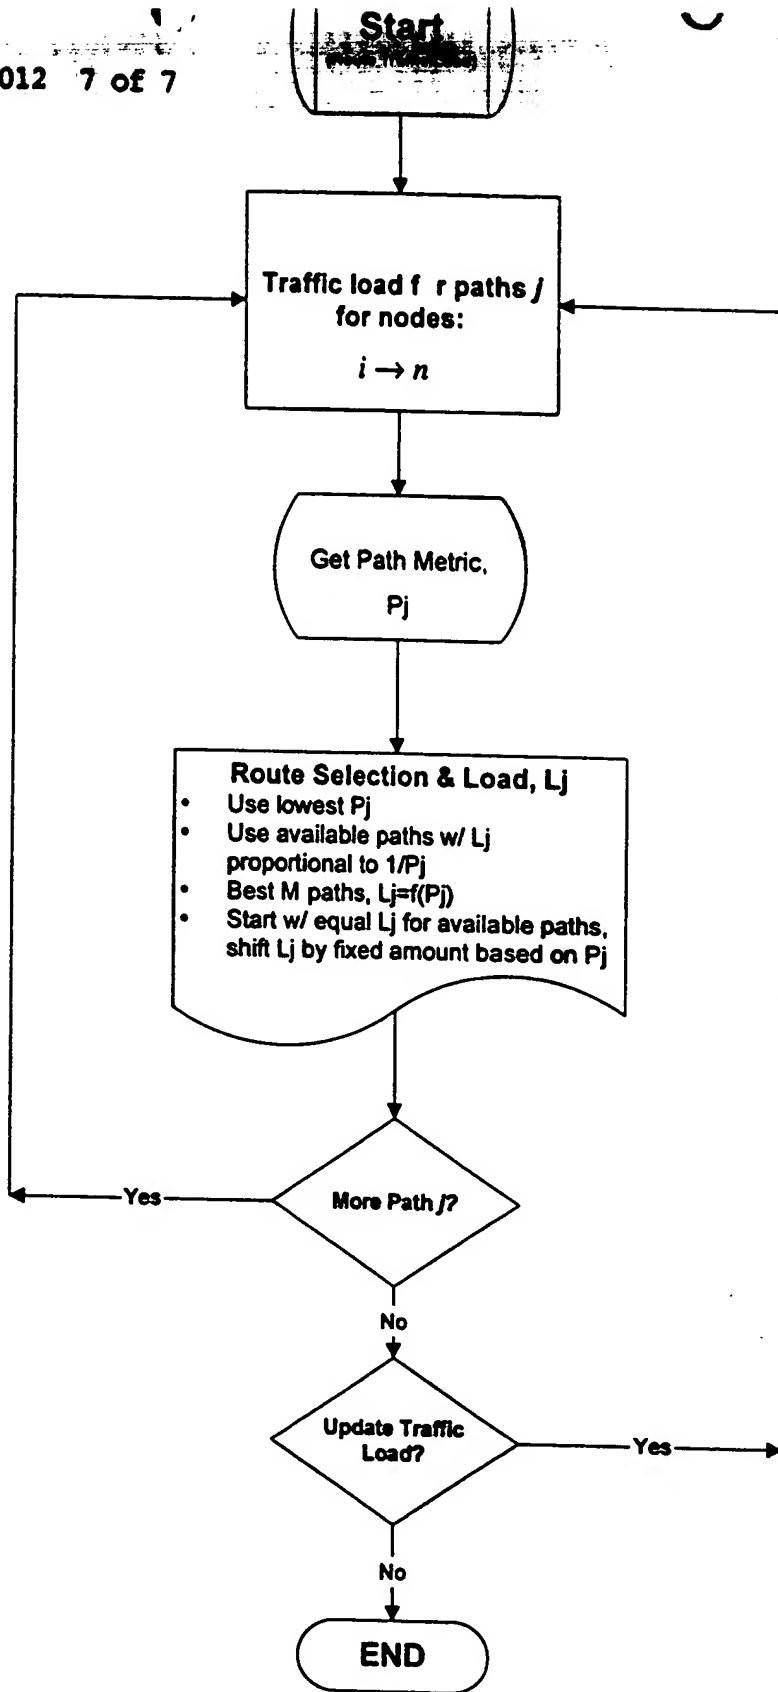

*Fig. 10*